

## 7 Inch IP Kit



VTO6210BW



VTH1560BW

## Features

- 7" color TFT-LCD capacitive touch screen
- Cat 5e system, easy installation
- Support monitoring, video talk, unlock function
- Compatible to up to 8 security sensors (burglar, fire, gas leakage, etc)
- Color 1MP CMOS night vision camera
- Support IC card opening
- Intercom between all indoor monitors
- Picture capture, video record for visitors
- Support 32 channel IP camera surveillance

## Specifications


| Mode      |                             | VTO6210BW                           |
|-----------|-----------------------------|-------------------------------------|
| System    | Main Processor              | Embedded micro processor            |
|           | Operation System            | Embedded LINUX OS                   |
| Video     | Video Compression Standard  | H.264                               |
|           | Input/Approaching Induction | 1MP CMOS HP camera                  |
|           | Black Light                 | Support                             |
| Audio     | Audio Input                 | All-direction Microphone            |
|           | Audio Output                | Built-in speaker                    |
|           | Bidirectional Talk          | Support dual-way bidirectional talk |
| Operation | Input                       | Digital keyboard                    |

## VTKB-VTO6210BW-VTH1560BW

|                                 |                             |                                     |
|---------------------------------|-----------------------------|-------------------------------------|
| <b>Mode</b>                     | <b>Card</b>                 | Built-in IC card induction reader   |
| <b>Alarm and Access Control</b> | <b>Vandal proof</b>         | Support                             |
|                                 | <b>Access control</b>       | Support by expansion mode           |
| <b>Network</b>                  | <b>Ethernet</b>             | 10M/100Mbps Self-adaptive           |
|                                 | <b>Network Protocol</b>     | TCP/IP,SNMP,MDI/MDI-X Self-adaptive |
| <b>Storage</b>                  | <b>Memory</b>               | 128MB                               |
| <b>Others</b>                   | <b>Power</b>                | DC 10~15V                           |
|                                 | <b>Power Consumption</b>    | Standby ≤1W, work ≤5W               |
|                                 | <b>Working Environments</b> | -10℃ — +55℃                         |
|                                 | <b>Water Proof</b>          | IP65                                |
|                                 | <b>Dimensions</b>           | 154.2mm*114.2mm*43.0mm (L*W*T) ;    |
|                                 | <b>Weight</b>               | 0.6Kg;                              |

| Model                  |                           | VTH1560BW                                                                                        |
|------------------------|---------------------------|--------------------------------------------------------------------------------------------------|
| <b>System</b>          | <b>Main Processor</b>     | Built-in microcontroller                                                                         |
|                        | <b>Operation System</b>   | Embedded LINUX operating system                                                                  |
| <b>Video</b>           | <b>compression</b>        | H.264                                                                                            |
|                        | <b>Resolution</b>         | 800*480                                                                                          |
| <b>Audio</b>           | <b>Audio Input</b>        | All-direction microphone                                                                         |
|                        | <b>Audio Output</b>       | Embedded loudspeaker                                                                             |
|                        | <b>Bidirectional Talk</b> | Support bidirectional talk                                                                       |
| <b>Display</b>         | <b>Size</b>               | Color 7-inch TFT LCD                                                                             |
| <b>Operating modes</b> | <b>input</b>              | Mechanical keys(emergency, protection, video talk, monitoring, unlock ), Touch screen technology |
| <b>Alarm</b>           | <b>Alarm input</b>        | Support 8 channels input                                                                         |
| <b>Network</b>         | <b>Ethernet</b>           | 10 M / 100 Mbps adaptive                                                                         |
|                        | <b>network protocol</b>   | TCP/IP                                                                                           |
| <b>General</b>         | <b>Power</b>              | DC 10~15V or supply directly by Special switching power                                          |
|                        | <b>Power Consumption</b>  | Standby ≤1.5W, work ≤7W                                                                          |
|                        | <b>work environment</b>   | <b>Temperature:</b> -10℃~+60℃                                                                    |
|                        |                           | <b>Humidity:</b> 10~90%RH                                                                        |
|                        | <b>Dimensions</b>         | 221.2mm×154.3mm×24.2mm (L*W*T) ;                                                                 |
|                        | <b>Weight</b>             | 0.8Kg;                                                                                           |

## Application

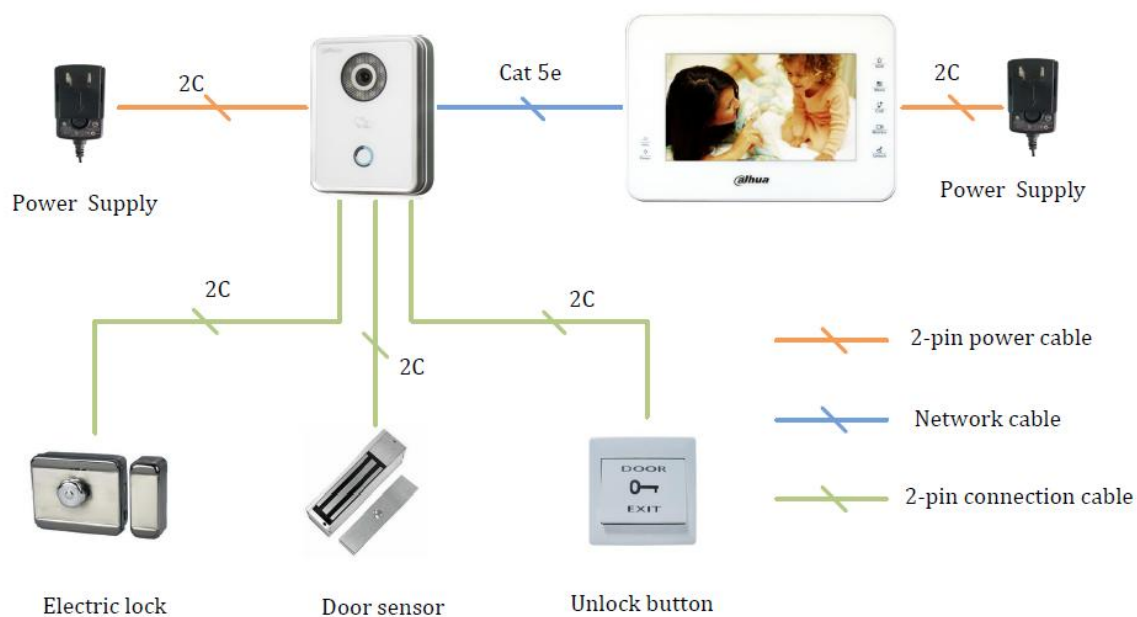

### Dahua Technology Co., Ltd.

1199BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: [overseas@dahuatech.com](mailto:overseas@dahuatech.com)

[www.dahuatech.com](http://www.dahuatech.com)

\*Design and specifications are subject to change without notice.