

Apartment Outdoor Station



Features

- Display: 3-inch STN screen or 3.5-inch LCD screen
- Camera: 1.3 mega pixel camera
- Excellent night vision effect
- Aluminum die-casting construction plate
- Call indoor monitor and management centre
- Support contacts call function
- Support open with pass word and IC card
- Support unlock remotely
- Save visitor audio and video function
- Support extension A&C module


Specifications

Mode		DH-VTO1210A-X
System	Main Processor	Embedded micro processor
	Operation System	Embedded LINUX OS
Video	Video Compression Standard	H.264
	Input/Approaching Induction	1.3 megapixel CMOS camera
	Black Light	Support
	Auto Light Compensation	Support
Audio	Audio Input	Microphone
	Audio Output	Built-in speaker
	Bidirectional Talk	Support dual-way bidirectional talk
Display	LCD Dimensions	3-inch STN screen
	Resolution	128*64
Operation Mode	Input	Digital keyboard
	Card	Built-in IC card induction reader
Approaching Induction	Body Approaching	Not applicable
Alarm	Vandal proof	Support
Access Control	No Output	Support
	NC Output	Support
	Door on/off Button	Support
	Door Status Detect	Support
Network	Ethernet	10M/100Mbps Self-adaptive
	Network Protocol	TCP/IP
Storage	Memory	128MB
Others	Power	DC 10~15V
	Power Consumption	Standby ≤1W, work ≤10W
	Working Environments	-10℃ — +60℃
		10% — 95%RH

DH-VTO1210A-X

	Dimensions	376.0mm*150.0mm*59.1mm (L*W*T) ;
	Weight	1.6Kg;

Dimensions

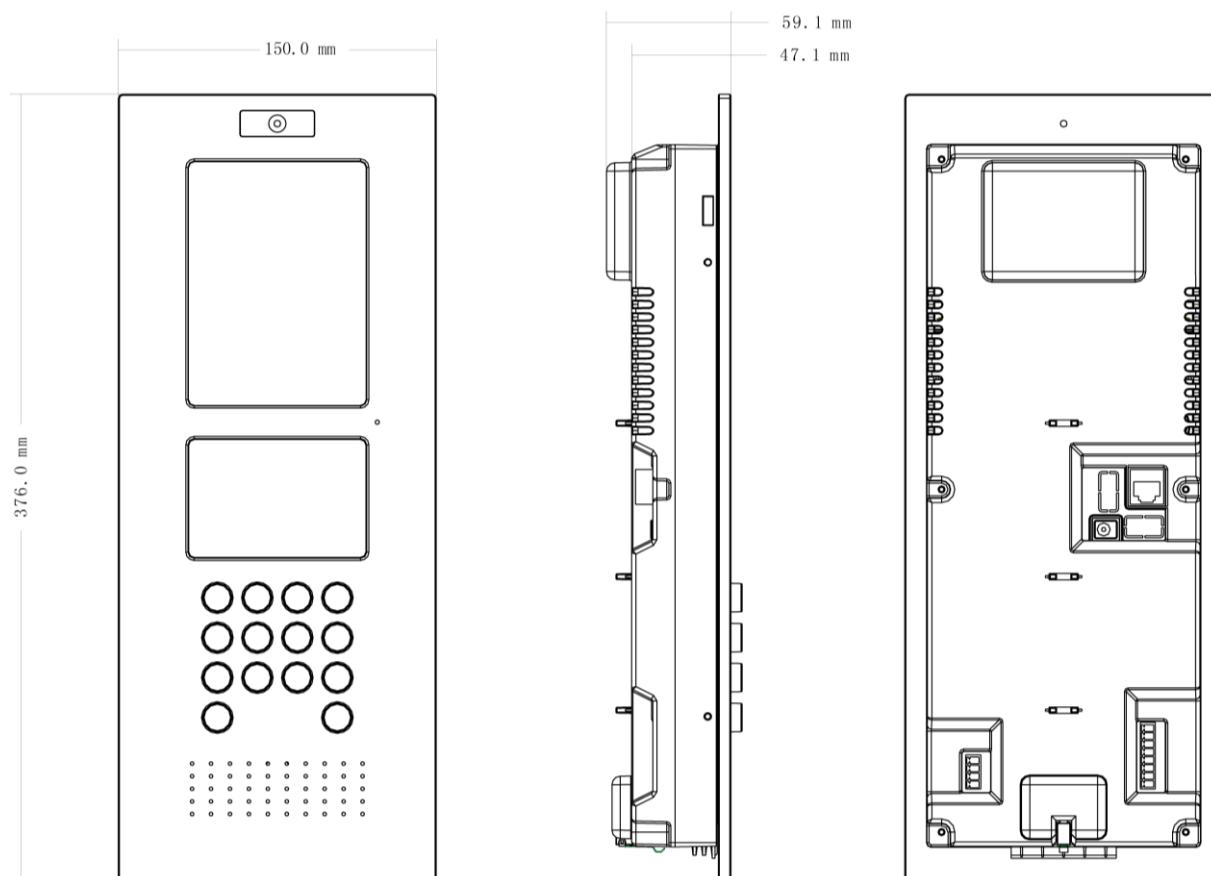

Dahua Technology Co., Ltd.

1187BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.