

## Apartment Outdoor Station



### Features

- 3-inch STN screen, vivid pictures are on show
- The black-crystal glass panel, touch buttons.
- Adopt TCP/IP network host, support SNMP network protocol.
- Network security technology, provides stable and safe operating environment.
- Support night vision, voice indication
- Embedded installation
- Support card and password to open the door
- IP65


## Specifications

| Mode                  |                             | DH-VTO1210B-X                       |
|-----------------------|-----------------------------|-------------------------------------|
| System                | Main Processor              | Embedded micro processor            |
|                       | Operation System            | Embedded LINUX OS                   |
| Video                 | Video Compression Standard  | H.264                               |
|                       | Input/Approaching Induction | 1.3 megapixel CMOS camera           |
|                       | Black Light                 | Support                             |
|                       | Auto Light Compensation     | Support                             |
| Audio                 | Audio Input                 | Microphone                          |
|                       | Audio Output                | Built-in speaker                    |
|                       | Bidirectional Talk          | Support dual-way bidirectional talk |
| Display               | LCD Dimensions              | 3-inch STN screen                   |
|                       | Resolution                  | 128*64                              |
| Operation Mode        | Input                       | Touch keyboard                      |
|                       | Card                        | Built-in IC card induction reader   |
| Approaching Induction | Body Approaching            | 1 meter                             |
| Alarm                 | Vandal proof                | Support                             |
| Access Control        | No Output                   | Support                             |
|                       | NC Output                   | Support                             |
|                       | Door on/off Button          | Support                             |
|                       | Door Status Detect          | Support                             |
| Network               | Ethernet                    | 10M/100Mbps Self-adaptive           |
|                       | Network Protocol            | TCP/IP                              |
| Storage               | Memory                      | 128MB                               |
| Others                | Power                       | DC 10~15V                           |
|                       | Power Consumption           | Standby ≤1W, work ≤10W              |
|                       | Working Environments        | -40℃ — +60℃                         |
|                       |                             | 10% — 95%RH                         |
|                       | Water Proof                 | IP65                                |

## DH-VTO1210B-X

|  |                   |                                  |
|--|-------------------|----------------------------------|
|  | <b>Dimensions</b> | 408.0mm*150.0mm*46.4mm (L*W*T) ; |
|  | <b>Weight</b>     | 1.6Kg;                           |

## Dimensions

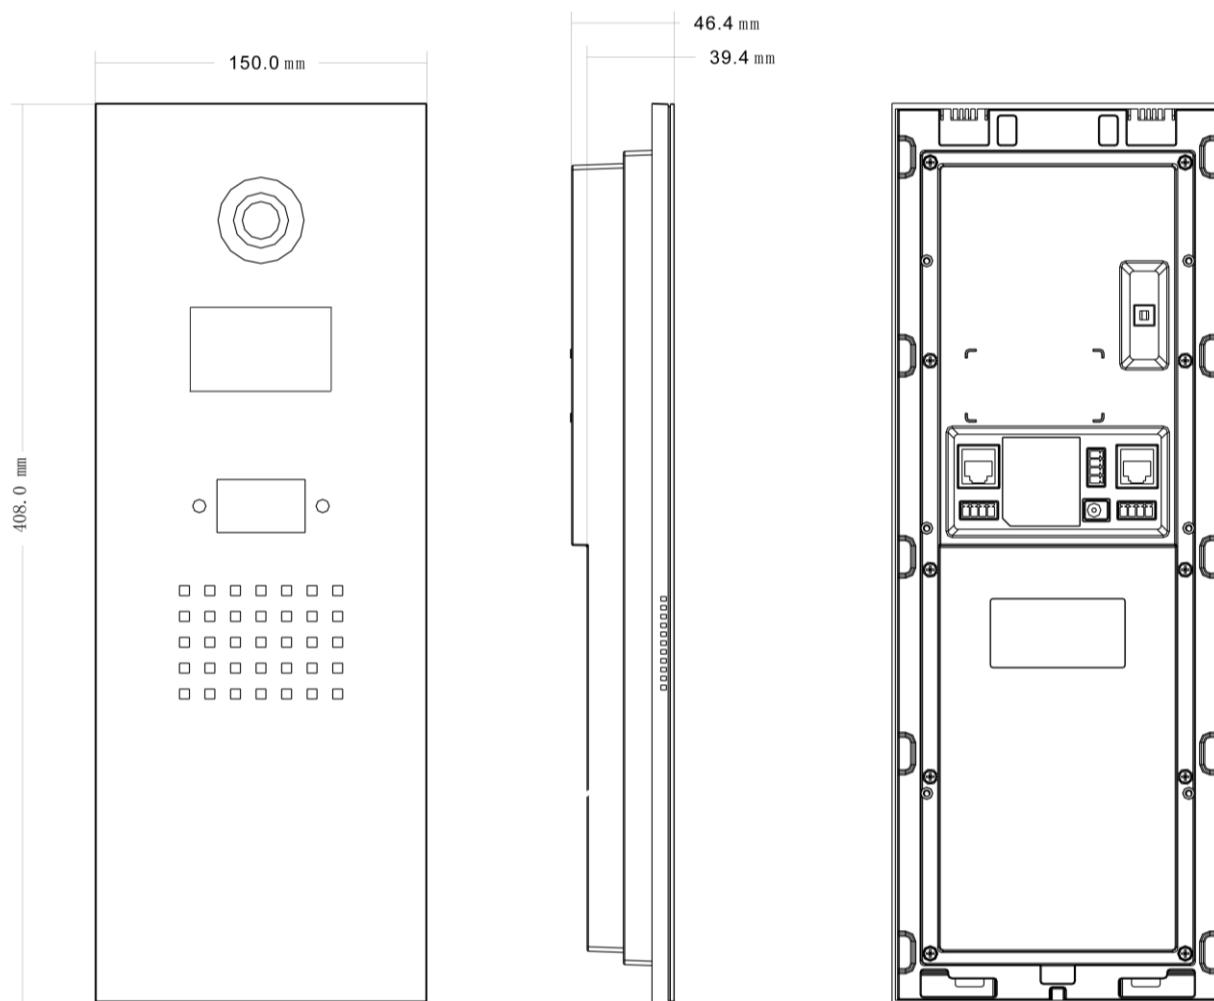

### Dahua Technology Co., Ltd.

1187BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: [overseas@dahuatech.com](mailto:overseas@dahuatech.com)

[www.dahuatech.com](http://www.dahuatech.com)

\*Design and specifications are subject to change without notice.