

## Villa Outdoor Station



## Features

- Being equipped with advanced built-in system and software, suit for villa
- Camera: 1.3 MP CMOS camera
- Night vision: the particular white light in the camera able to make the clear picture at night
- One button with background light ,easy to operate
- Call indoor monitor and management centre
- Support IC card opening
- Support unlock remotely
- Support visitor leaving audio and video message
- Support group call function


## Specifications

| Mode   |                            | DH-VTO6100C              |
|--------|----------------------------|--------------------------|
| System | Main Processor             | Embedded micro processor |
|        | Operation System           | Embedded LINUX OS        |
| Video  | Video Compression Standard | H.264                    |

## DH-VTO6100C

|                                 |                                    |                                   |
|---------------------------------|------------------------------------|-----------------------------------|
|                                 | <b>Input/Approaching Induction</b> | 1.3MP CMOS HD camera              |
|                                 | <b>Black Light</b>                 | Support                           |
| <b>Audio</b>                    | <b>Audio Input</b>                 | Omnidirection Microphone          |
|                                 | <b>Audio Output</b>                | Built-in loudspeaker              |
|                                 | <b>Bidirectional Talk</b>          | Support bidirectional talk        |
| <b>Operation Mode</b>           | <b>Input</b>                       | One-key input (with blacking)     |
|                                 | <b>Card</b>                        | Built-in IC card induction reader |
| <b>Alarm and Access Control</b> | <b>Vandal proof</b>                | Support                           |
| <b>Network</b>                  | <b>Ethernet</b>                    | 10M/100Mbps Self-adaptive         |
|                                 | <b>Network Protocol</b>            | TCP/IP                            |
| <b>Storage</b>                  | <b>Memory</b>                      | 128MB                             |
| <b>General</b>                  | <b>Power</b>                       | DC 10~15V                         |
|                                 | <b>Power Consumption</b>           | Standby ≤1W, work ≤10W            |
|                                 | <b>Working Environments</b>        | -10℃ — +60℃, 10~95% RH            |
|                                 | <b>Dimensions</b>                  | 141.0mm*100.0mm*16.8mm (L*W*T) ;  |
|                                 | <b>Weight</b>                      | 0.5Kg                             |

## Dimensions

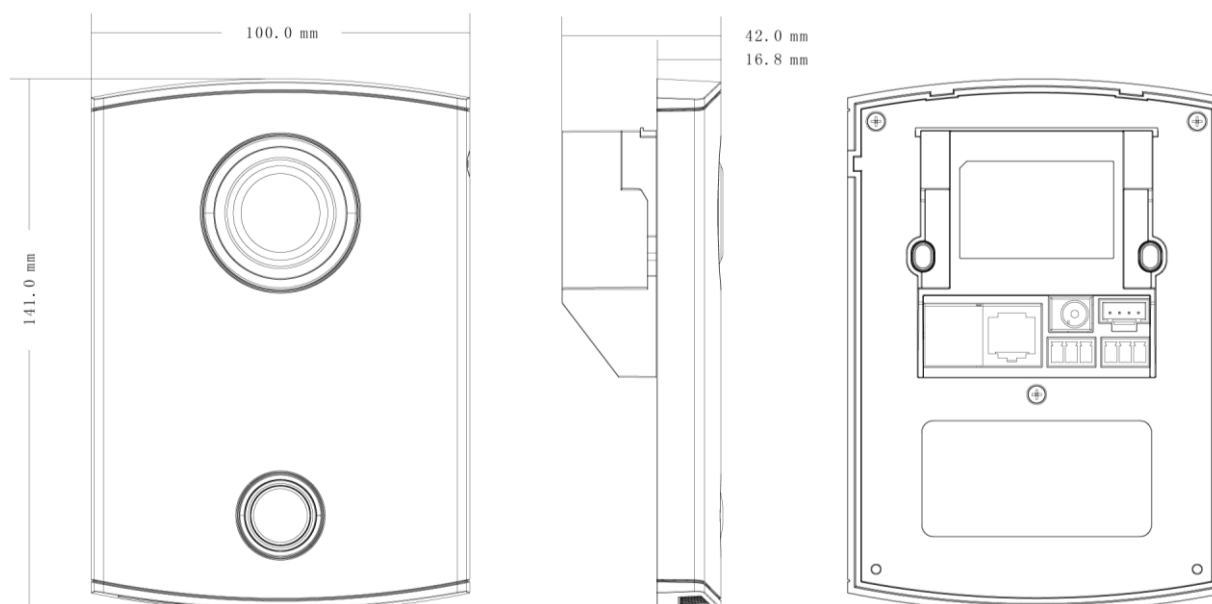

## DH-VTO6100C

---

**Dahua Technology Co., Ltd.**

1187BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: [overseas@dahuatech.com](mailto:overseas@dahuatech.com)

[www.dahuatech.com](http://www.dahuatech.com)

\*Design and specifications are subject to change without notice.